


Mortice lock, profile cylinder

F

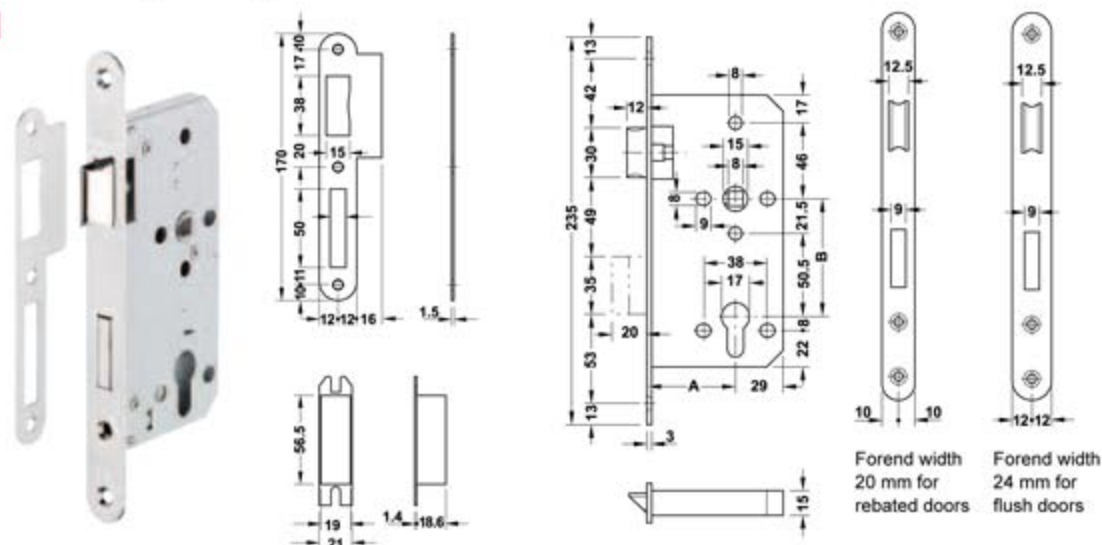

- Area of application: For rebated or flush doors
- Material: Forend, latchbolt and deadbolt: Stainless steel, lock case: Steel, deadbolt pocket: Plastic
- Closure: Prepared for profile cylinder
- Deadbolt: 2-turn
- Version: With key action
- Forend: Round or square
- Lever follower: 8 mm
- Distance B: 72 mm
- Standard: Certified in compliance with EN 12209:2003
- Class: 


3	S	8	1	0	F	2	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---

Supplied with

- 1 mortice lock
- 1 flanged striking plate
- 2 deadbolt pockets

Forend width mm	Forend	Mounting	Matt brushed	Brass coloured polished	Brass coloured PVD coating	Graphite black PVD coating
<b>Backset A 55 mm</b>						
20	Square	DIN left and DIN right, reversible	911.02.143	911.02.144	911.25.444	911.25.420
	Round		911.02.151	911.02.152	911.25.452	911.25.421
24	Square		911.02.145	911.02.146	911.25.446	911.25.422
	Round		911.02.153	911.02.154	911.25.454	911.25.200
<b>Backset A 60 mm</b>						
24	Square	DIN left and DIN right, reversible	911.02.464	911.02.467	–	–
	Round		911.02.468	911.02.471	–	–
<b>Backset A 65 mm</b>						
24	Square	DIN left and DIN right, reversible	911.02.480	911.02.483	–	–
	Round		911.02.484	911.02.487	–	–

→ Intumescent fire protection kit for mortice locks

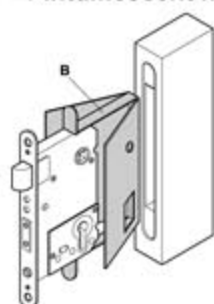

B = intumescent fire protection kit for mortice locks

Dim. (L x W) mm	Material thickness mm	Cat. No.
165 x 90	1	950.11.010
165 x 90	2	950.11.011

Packing: 1 set

Note

See page 6.38 for more information on the product.